



ROE-LIFT® “Midi”

FEATURES

- High speed, High Capacity, Gentle
- Provides Completely Automatic Accumulation during downstream Machinery Downtime.
- Open access from operator side and visibility of accumulated product from all sides.
- Rwave® Transfer available on all Mini Models - Allows two or more rows of product to be accumulated on every lift rail.
- Optional Graphical User Interface with Reporting / Data Collection.
- Intuitive Operator Alarms and Displays for Operation and Maintenance.

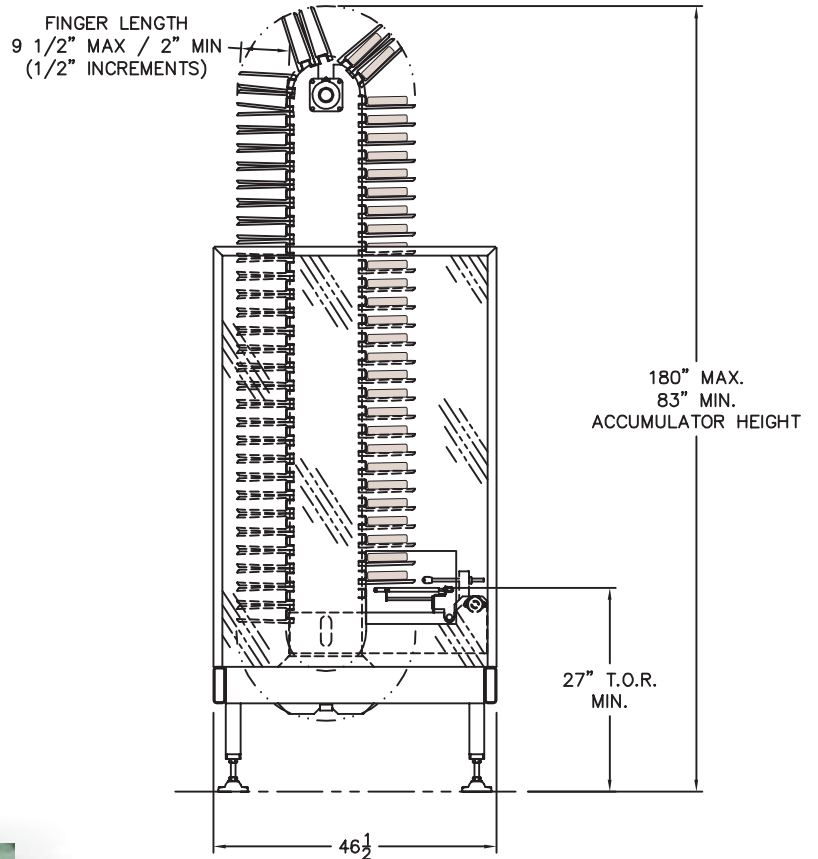

The "Midi" is one of our four "standard footprint" ROE-LIFT® Accumulators. Its time tested and patented design provide a reliable, high speed and high volume accumulation solution. By standardizing the length and width and building to your height and accumulation requirements, we are able to offer the Midi at a substantial cost savings over other accumulation methods.

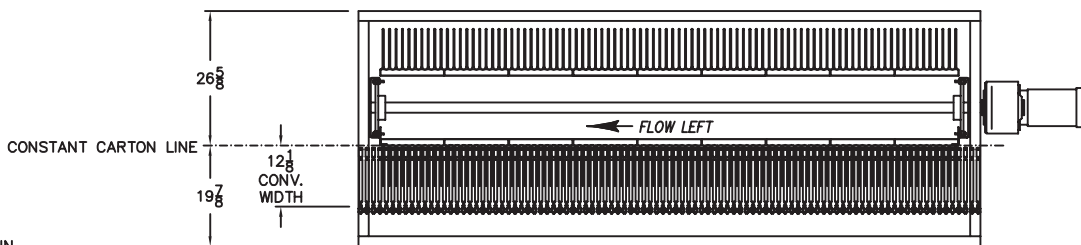

* DIMENSIONS ARE SHOWN IN INCHES AND ARE FOR REFERENCE ONLY.

* OPERATOR SIDE *

LH FLOW SHOWN
RH FLOWS OPPOSITE

